


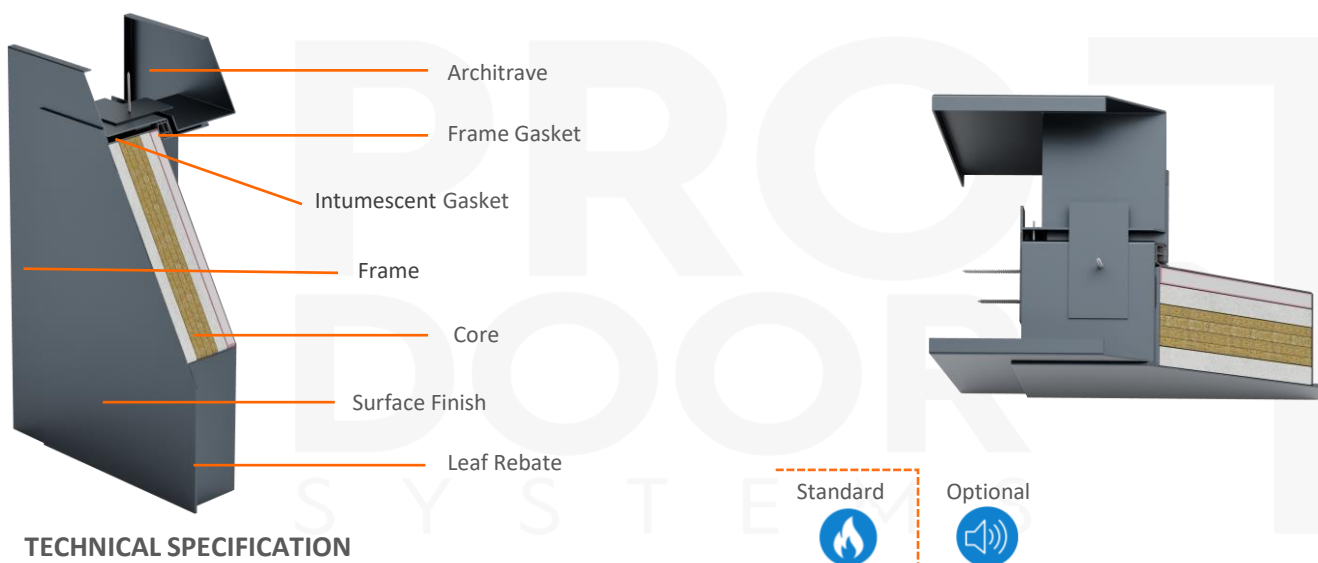

## TECHNICAL SPECIFICATION

|           |                       |                                                                                                                                                     |
|-----------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| LEAF TYPE | Leaf Thickness        | 70mm                                                                                                                                                |
|           | Leaf Surface Material | Galvanize                                                                                                                                           |
|           | Surface Finish        | Powder Coated                                                                                                                                       |
|           | Leaf Sheet Thickness  | Standard: 1,0mm, Optional: 1,2mm                                                                                                                    |
|           | Core Type             | 128 kg/m <sup>3</sup> x 12,5mm Ceramic Wool, 110 kg/m <sup>3</sup> x 30mm Rockwool, 128 kg/m <sup>3</sup> x 12,5mm Ceramic Wool, 12,5mm Fire Gypsum |
|           | Reinforcement         | Standard: Hinge Reinforcement, Optional: Stiffener                                                                                                  |
|           | Rebate on Leaf        | Yes / 3mm                                                                                                                                           |

|            |                    |                                                            |
|------------|--------------------|------------------------------------------------------------|
| FRAME TYPE | Frame Type         | Standard: Corner Frame, Optional: Full Frame & Block Frame |
|            | Frame Material     | Galvanize                                                  |
|            | Material Thickness | Standard: 1,6mm, Optional: 1,8mm                           |
|            | Architrave         | 60mm - 72mm                                                |
|            | Surface Finish     | Powder Coated                                              |
|            | Rebate On Frame    | N/A                                                        |

|            |                          |              |
|------------|--------------------------|--------------|
| DIMENSIONS | Standard Wall Width      | 1000mm       |
|            | Standard Wall Height     | 2100mm       |
|            | Standard Wall Thickness  | 200mm        |
|            | Min - Max Wall Width     | 497 - 1145mm |
|            | Min - Max Wall Height    | 521 - 2398mm |
|            | Min - Max Wall Thickness | 100 - 390mm  |

|                |               |                                                       |
|----------------|---------------|-------------------------------------------------------|
| OTHER FEATURES | Hardwares     | Optional                                              |
|                | Glazing       | Optional                                              |
|                | Louver        | Optional With Additional                              |
|                | Gasketing     | Frame Gasket & Intumescent Gasket                     |
|                | Acoustical    | Optional 35dB, 42dB                                   |
|                | Fire Rating   | EI90 / EI60                                           |
|                | Smoke Proof   | Optional                                              |
|                | Certification | TSE / 11/05/2020 - 528361 - TSE / 11/05/2020 - 528359 |
|                | Transom Panel | N/A                                                   |