


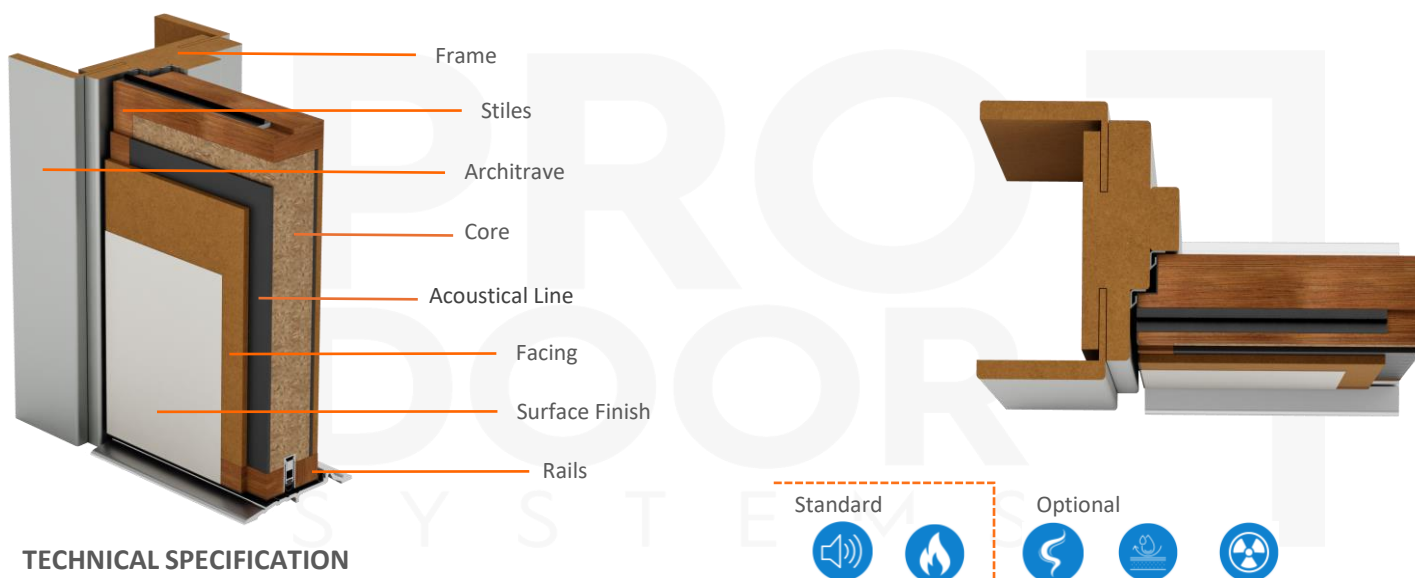

## TECHNICAL SPECIFICATION

|           |                |                                                                 |
|-----------|----------------|-----------------------------------------------------------------|
| LEAF TYPE | Leaf Thickness | 64mm                                                            |
|           | Surface Finish | HPL (Hight Pressure Laminate), Lacquered, Natural Wood Veneered |
|           | Edge           | 0.8mm PVC, Lacquered or Veneered                                |
|           | Facing         | 6mm MDF + 3,5mm Acoustical Line                                 |
|           | Core Type      | Rockwool Core + Acoustical Gypsum Core                          |
|           | Rails & Stiles | 42mm Softwood                                                   |
|           | Lipping        | N/A                                                             |
|           | Groove         | Optional                                                        |
|           | Molding        | Optional                                                        |
|           | Rebate on Leaf | Rebated                                                         |

|            |                    |                                                               |
|------------|--------------------|---------------------------------------------------------------|
| FRAME TYPE | Frame Material     | Standard: MDF   Optional: Hardwood                            |
|            | Material Thickness | Standard: 42mm MDF   Optional: 40mm Hardwood                  |
|            | Architrave         | Standard: 8x80mm MDF   Optional: 12x80mm / 18x80mm / 18x100mm |
|            | Surface Finish     | CPL, Lacquered or Natural Wood Veneered                       |
|            | Rebate On Frame    | Rebated                                                       |

|            |                         |                            |
|------------|-------------------------|----------------------------|
| DIMENSIONS | Standard Wall Width     | Single: 800 / 900 / 1000mm |
|            | Standard Wall Height    | 2100 / 2200mm              |
|            | Standard Wall Thickness | 110   150   170   210mm    |
|            | Max Wall Width          | 1200mm                     |
|            | Max Wall Height         | 2500mm                     |
|            | Max Wall Thickness      | 240mm                      |
|            | Doorset Option          | Only Single                |

|                |               |                                                               |
|----------------|---------------|---------------------------------------------------------------|
| OTHER FEATURES | Hardwares     | Standard: Door Bottom + Threshold   Optional: Other Hardwares |
|                | For Glazing   | Optional                                                      |
|                | For Louver    | N/A                                                           |
|                | Gasketing     | Acoustic Seal + 20x4mm Intumescent Seal                       |
|                | Acoustical    | 42dB                                                          |
|                | Fire Rating   | Standard: 30 min.   Optional: 60-90 min.                      |
|                | Certification | BS 476-22 - ISO 9001 - ISO 14001                              |
|                | Transom Panel | N/A                                                           |